




LG VX4500 display screen replacement

Written By: David Foster

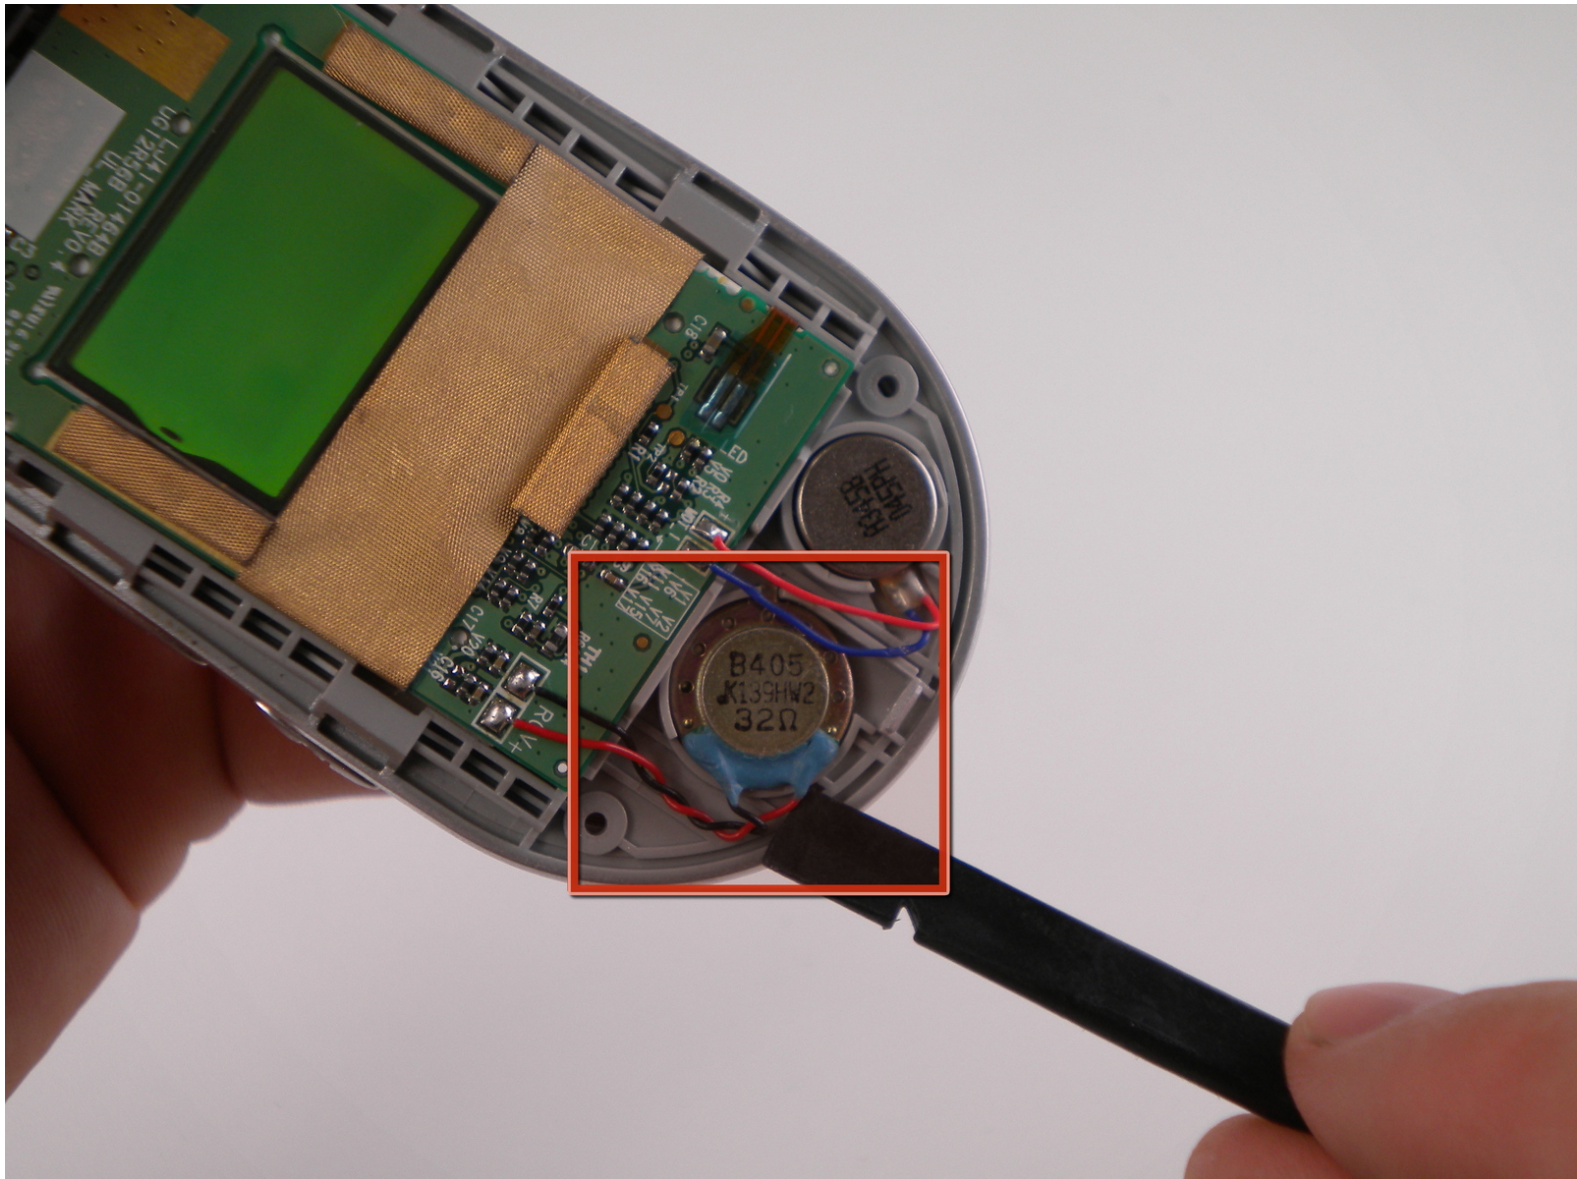

INTRODUCTION

Replacing the LCD screen.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Soldering Station](#) (1)
 - [Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Turn the closed phone so that the back panel is facing you.
- Press down and forward firmly on the gray tab in the middle of the phone.

Step 2



- Now just lift up on the battery and remove it from the phone.

Step 3 — Outer Display Cover




- Remove 4 rubber grommets using the Spudger.

Step 4




- Remove 4 screws using the Phillips #00 Screwdriver.

Step 5

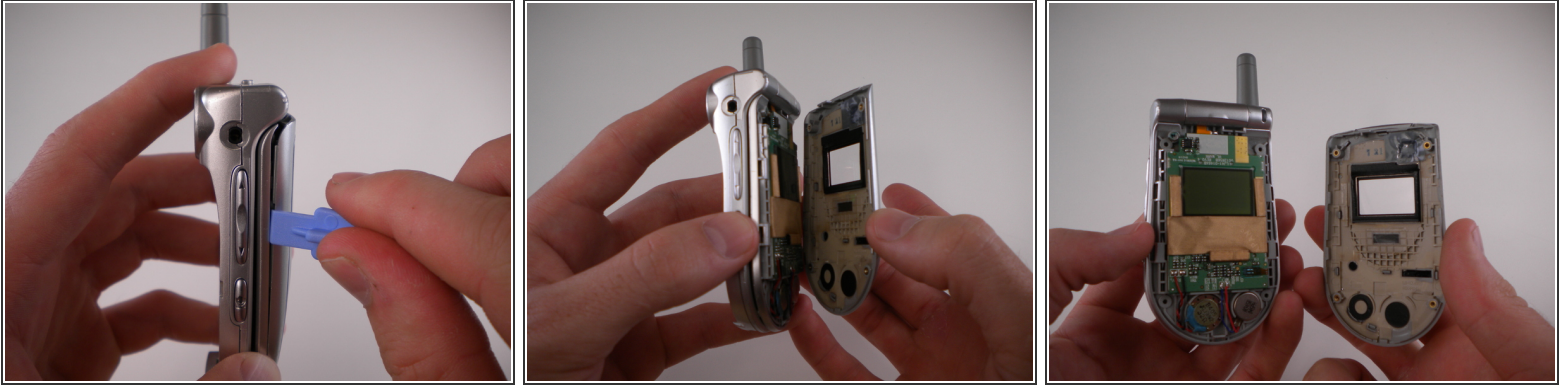



- Carefully pry off outer cover using iPod Opening Tool.

Step 6 — Display

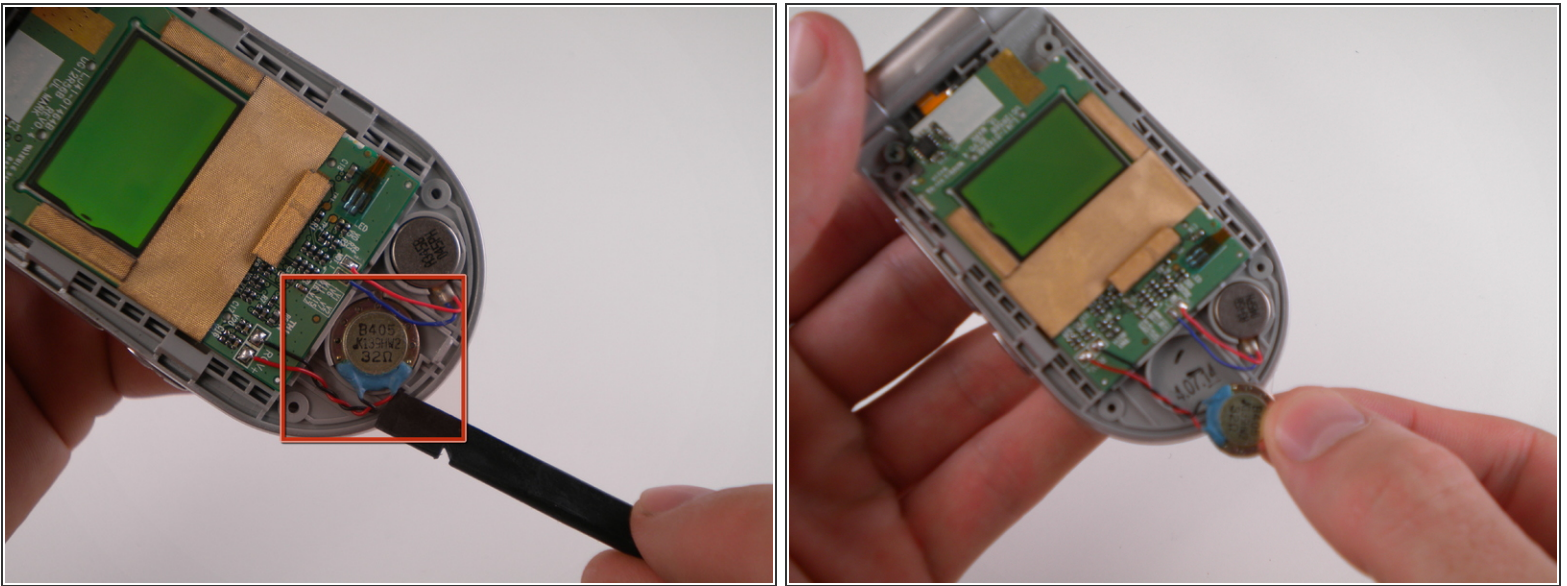



- Remove speaker using the Spudger.

Step 7

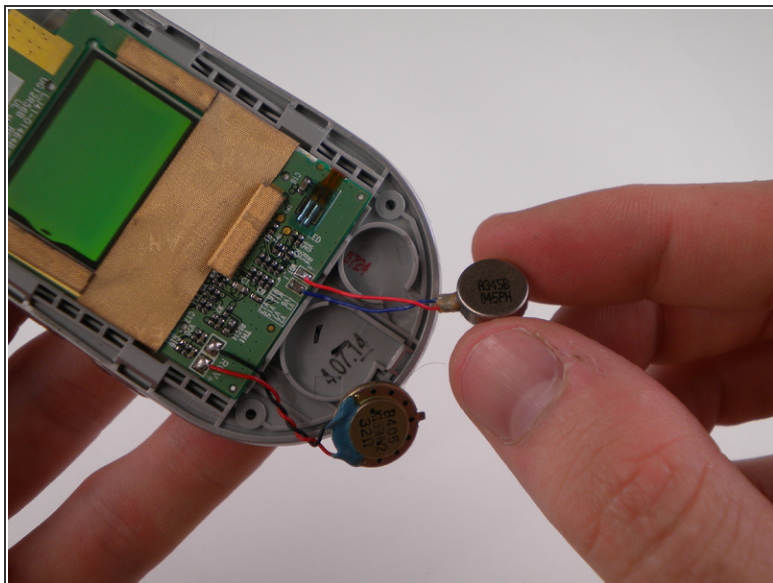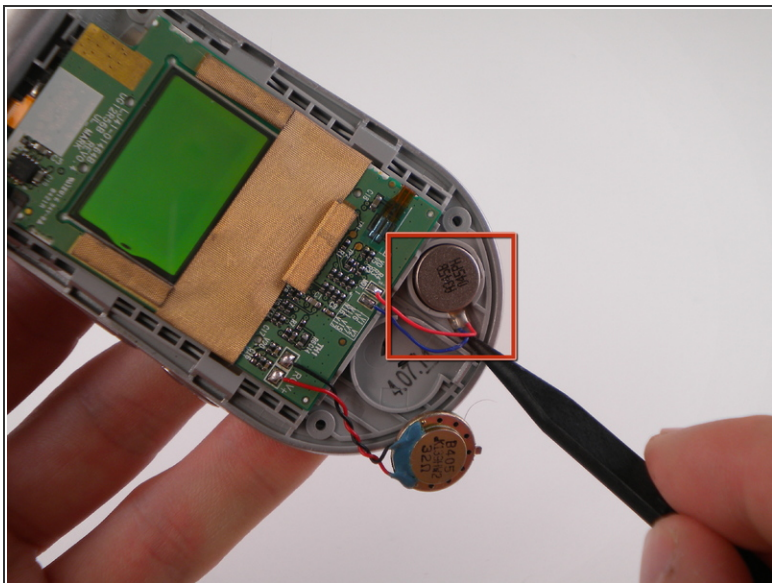

- Remove vibrator using the Spudger.

Step 8

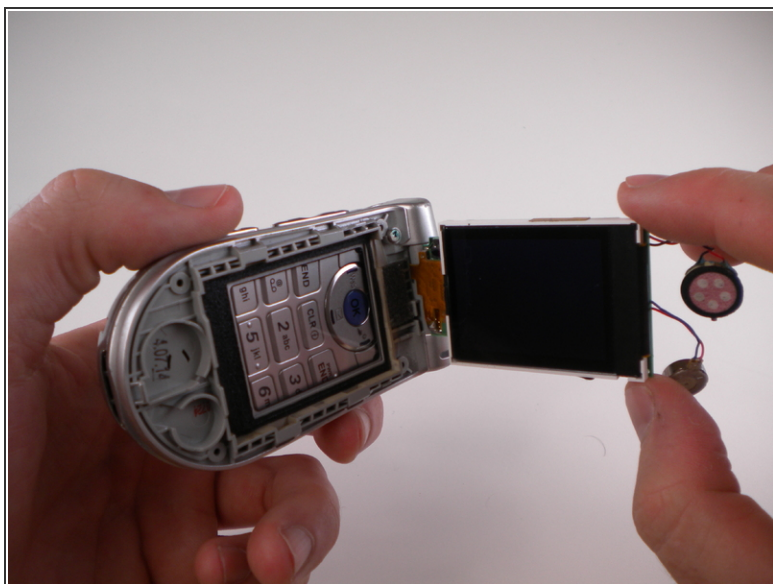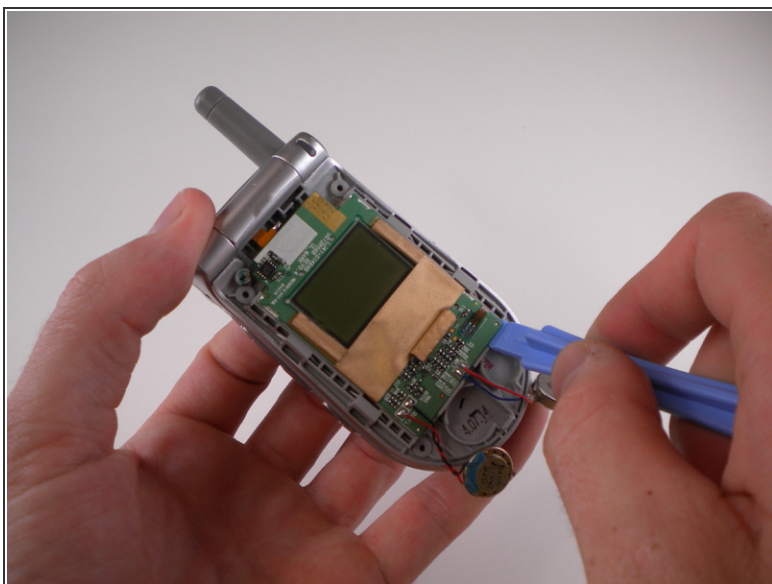

- Lift up LCD display using iPod Opening Tool.

Step 9



⚠ DO NOT TOUCH THE SOLDERING IRON. IT IS EXTREMELY HOT!

- De-solder solder joint using Soldering Iron.

Step 10



- Pry off ribbon cable using iPod Opening Tool.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-21 06:54:30 PM.

